




# DeltaV™ Controller Interface for PROVOX® I/O

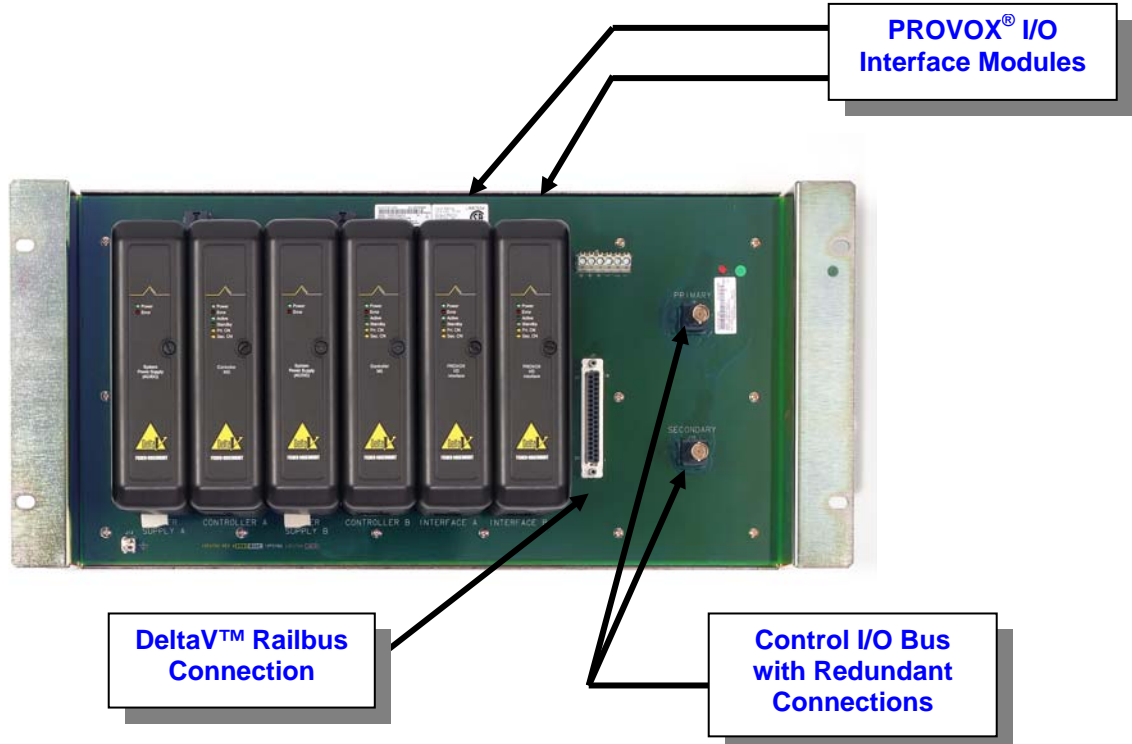

Upgrade your PROVOX® controllers with the DeltaV™ Controller Interface for PROVOX I/O and retain your installed PROVOX I/O. (Showing redundant configuration)

- Provides a fast and easy upgrade for PROVOX® IFC, UOC, SR90 and SRx controllers
- Maximizes investment in PROVOX I/O
- Saves wiring costs—no rewiring!
- Redundancy in controllers
- Redundancy in Control I/O connections
- Retains the I/O redundancy in Control I/O

## Introduction

Emerson Process Management continues its long-standing excellence in providing solid control solutions with DeltaV™ Controller Interface for

PROVOX® I/O and DeltaV MD Plus or MX Controllers. You can transition to DeltaV controllers and connect to PROVOX I/O already installed in your plant, continuing to maximize your original PROVOX I/O investment.

The DeltaV Controller Interface for PROVOX I/O can be used with both Control I/O and MUX I/O, which connects using the serial buffer card. The interface to PROVOX Control I/O uses an MD Plus or MX controller and a DeltaV power supply installed on the PROVOX I/O Carrier.

With this solution, PROVOX I/O support is integrated into standard DeltaV engineering and diagnostics, including DeltaV Explorer and Control Studio.



## Benefits

### Provides an easy upgrade for PROVOX IFC, UOC, SR90 and SRx Controllers

You can easily upgrade your UOC+, IFC, 20 Series, SR90 or SRx controller to a DeltaV controller, and continue to use PROVOX I/O by connecting it to the DeltaV controller carrier.

### Maximizes investment in PROVOX I/O

Using your PROVOX I/O with a DeltaV controller maximizes your investment in PROVOX I/O, extending its useful life and saving the cost of new I/O.

### Saves wiring costs

DeltaV Controller Interface for PROVOX I/O enables you to greatly reduce wiring costs and shorten

turnaround time, because you don't have to re-wire field devices to new I/O.

### Redundancy in controllers

Two DeltaV controllers and power supplies can be mounted on the carrier for full controller redundancy.


### Redundancy in Control I/O connections

The DeltaV Controller for PROVOX I/O carrier provides for redundant connections to Control I/O files.

### Retains I/O redundancy in Control I/O

DeltaV Controller Interface for PROVOX I/O allows use of flexible redundancy arrangements possible with Control I/O, including 1:1 and 1:N card redundancy.

DeltaV™ Controller Interface for PROVOX® I/O

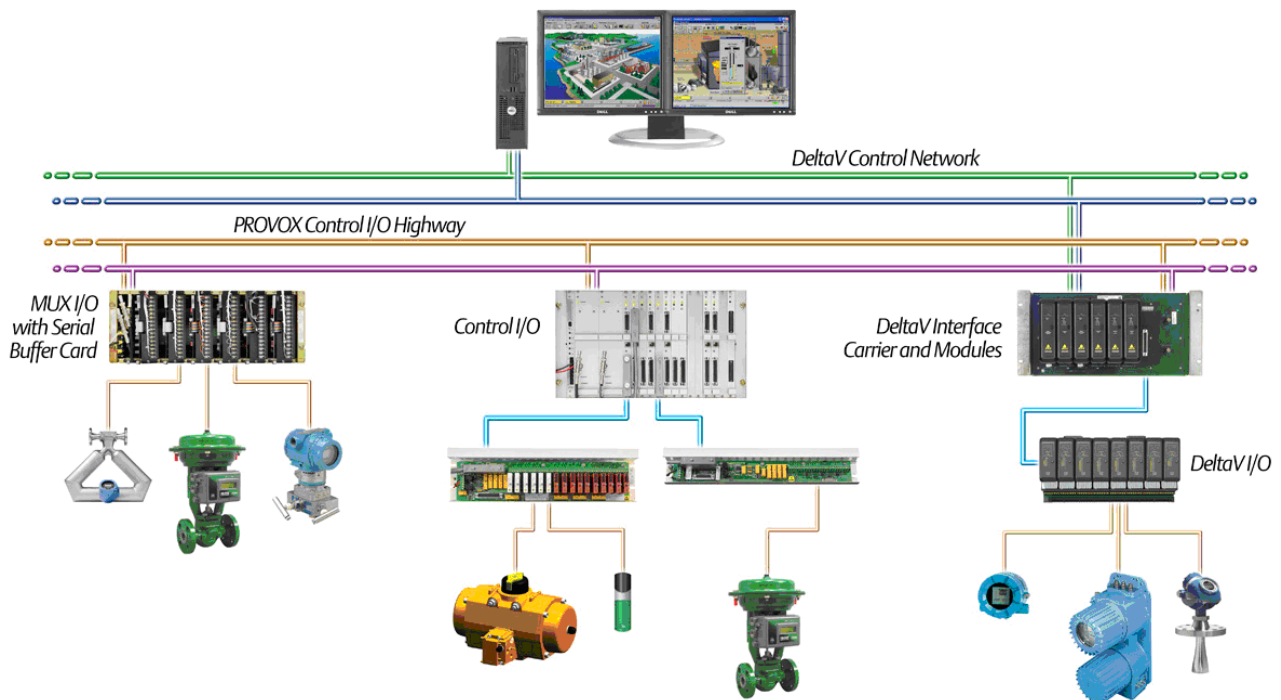



## Product Description and Specification

The DeltaV Controller Interface for PROVOX I/O consists of a 19 inch rack mountable controller carrier, simplex or redundant DeltaV MD Plus or MX controllers with power supplies, and a PROVOX I/O Interface for each controller.

**DeltaV MD Plus or MX Controller.** Mount one DeltaV MD Plus controller (with DeltaV v7.2 or later firmware) or MX controller (with DeltaV v10.3 or later firmware) on the carrier for a simplex installation. Mount two MD Plus or MX controllers for a redundant installation. MD Plus and MX controllers can handle up to 750 and 1500 DSTs, respectively.

**PROVOX I/O Interface Module.** The PROVOX I/O Controller Interface supports redundant Control I/O communications and connections to Control I/O and Distributed I/O. Distributed I/O is MUX I/O connected to the controller through the CP6601 serial buffer card.

**Controller Carrier.** DeltaV controllers mount on a 19 inch rack specifically designed to accommodate:

- Two DeltaV MD Plus or MX controllers (one in a simplex installation)
- Two PROVOX I/O Interface modules (one in a simplex installation)
- Two DeltaV system power supplies (one in a simplex installation)

**Railbus Connection.** The PROVOX I/O Interface Carrier 37 pin railbus connection may be used to interface with additional DeltaV I/O modules. Standard 37 pin DeltaV interface cables are used to connect the PROVOX I/O Controller Interface Carrier to traditional DeltaV I/O horizontal carriers. This feature lets you easily expand your system with DeltaV I/O to fully utilize your DeltaV controller investment.

DeltaV Programmable Serial Cards can connect PLCs and other serial devices formerly connected to PROVOX IDIs or EICs (non weigh scale interface option on the EIC).

**Complete Integration.** The DeltaV Controller Interface for PROVOX I/O control solution is fully supported by DeltaV Explorer, Control Studio, and Diagnostic applications. You can configure and integrate PROVOX I/O as easily as DeltaV I/O.

DeltaV Explorer fully supports configuration, commissioning and assignment of PROVOX I/O (Control I/O and MUX I/O) cards. You can auto-sense Control I/O cards, and use DeltaV Explorer to enable and configure all I/O channels.

The DeltaV Diagnostic application supports all PROVOX I/O diagnostic messages. You can easily and thoroughly monitor I/O integrity.

**HART® Data Availability.** The DeltaV Controller Interface for PROVOX I/O solution can read smart information from field devices connected to PROVOX HART® input and output cards. All of the HART information available in your PROVOX controller is maintained in the DeltaV MD Plus or MX controller.

The interface can pass HART information to a DeltaV application station, enabling you to use applications such as Asset Management Solutions (AMS™) to manage the field devices.

## Third-party Application Options

- **Asset Management Solutions.** AMS uses the process control network, while DeltaV controllers and the PROVOX I/O Interface provide communications access to smart field devices. This provides a seamless solution to manage your plant assets.

## Products Included

- DeltaV MD Plus or MX Controller
- DeltaV Power Supply
- PROVOX I/O Carrier
- PROVOX I/O Interface



**Maximize your display engineering efficiency.** Emerson offers services for generating your new DeltaV displays. Learn how PROVOX configuration can be automatically converted or how new display and control designs can optimize effectiveness of your new DeltaV Controller Interface for PROVOX. For more information, see these data sheets:

[Control Configuration Transition Services](#)

[Display Transition Services](#)

## Ordering Information

DeltaV Controller Interface for PROVOX I/O consists of four types of components: a DeltaV MD Plus or MX controller, a DeltaV system power supply, a PROVOX I/O Carrier, and a PROVOX I/O Interface. Order entry numbers given in the following table include all components required for a solution. For **simplex** interface solutions, model numbers include one of each component and model numbers for **redundant** solutions include one PROVOX I/O Carrier and two each of the other components (controller, power supply, and I/O interface).

Description	Model Number
DeltaV Controller Interface for PROVOX I/O (Simplex)	<b>VE3021C3R1</b> (Using the MX controller)
DeltaV Controller Interface for PROVOX I/O (Redundant)	<b>VE3021C3R2</b> (Using the MX controller)
DeltaV Controller Interface for PROVOX I/O (Simplex)	<b>VE3021C2R1</b> (Using the MD Plus controller)
DeltaV Controller Interface for PROVOX I/O (Redundant)	<b>VE3021C2R2</b> (Using the MD Plus controller)

Order entry numbers and requirements for individual components of the DeltaV Controller Interface for PROVOX I/O solution are given in this table:

Description	Model Number
DeltaV MD Plus or MX Controller	<b>VE3006</b> or <b>VE3007</b>
PROVOX I/O Carrier	<b>VE4056</b> (KJ2101X1-CA1)
PROVOX I/O Interface	<b>VE4018R11</b> (KJ2101X1-BA1)
DeltaV System Power Supply	<b>VE5008</b> (Final assembly P/N 12P2186) or <b>VE5009</b> (Final assembly P/N 12P3935) is required with PROVOX CP6103 System Power Supply. For other power supply combinations, match source output voltage range to input voltage range of DeltaV Power Supply.

## Prerequisites

- For the MD Plus Controllers, DeltaV software release v7.2 or later is required.
- For the MX Controllers, DeltaV software release v10.3 or later is required.
- One DeltaV ProfessionalPLUS Station is required for each system.



### Control I/O cards

Supported	
Type No.	Description
CL6821	Analog I/O Card
CL6824	Analog Input Card
CL6822 CL6825 CL6827	HART Input Card
CL6826 CL6828	HART Output Card
CL6721	Discrete I/O Card
CL6921	External Interface Card – Weigh Scale Interface Option
NOT Supported	
Type No.	Description
CL6921	External Interface Card, Allen-Bradley Option
CL6922 CL6923	Intelligent Device Interface

Any I/O card not listed here is not supported.

### Additional Compatibilities

- The custom migration PROVOX I/O Carrier used in this solution is not compatible with a DeltaV Virtual I/O Module (VIM) from MYNAH Technologies.
- This solution is not compatible with DeltaV M-Series Zone 2 Remote I/O products.
- This migration controller solution does not support assignment of native Smart Wireless Gateways.

### Distributed I/O (Multiplexer I/O) cards

Supported (using Serial Buffer Card)	
Type No.	Description
DM6311	Analog Input SE 0-10 V Card
DM6311	Analog Input SE 1-5 V Card
DM6312	Isolated Analog Input 0-10 V Card
DM6312	Isolated Analog Input 1-5 V Card
DM6321	Analog Current Input Card (single-ended)
DM6322	Analog Current Input Card (isolated)
DM6331	RTD Input Card
DM6341	Analog Input Low mV Card
DM6341	Analog Input Low Special 1 Card
DM6341	Analog Input Low Special 2 Card
DM6351	Analog Input Thermocouple Type J High
DM6351	Analog Input Thermocouple Type J Low
DM6352	Analog Input Thermocouple Type K High
DM6352	Analog Input Thermocouple Type K Low
DM6353	Analog Input Thermocouple Type T
DM6354	Analog Input Thermocouple Type E
DM6355	Analog Input Thermocouple Type R
DM6361	Discrete Input Card
DM6362	Discrete Input Card (dry contacts)
DM6363	Discrete Input Card (120 Vac)
DM6371	Pulse Count Input Card
DM6372	Pulse Count Input Card (Dry Contacts)
DM6373	Pulse Count Input Card (Vortex)
DM6381	Weigh Scale Interface Card
DM6411	Analog Voltage Output Card
DM6421	Analog Current Output Card
DM6431	Time Proportional Output Card
DM6461	Discrete Output Card
DM6462	Discrete Output Card (internal relay)
DM6463	Discrete Output Card (external relay)
NOT Supported	
Type No.	Description
DM6004, DM6005	Virtual I/O Coupler
DM6391	ac <sup>2</sup> Interface Card



PROVOX I/O Interface Module Specifications	
<b>Power requirement</b> (DeltaV system power supply)	+12.0 VDC at 500 mA maximum
<b>Fuse protection</b>	3.0 A, non-replaceable fuses
<b>Power dissipation</b>	3.6 W typical, 6.0 W maximum
<b>Dimensions</b>	
Height	15.9 cm
Depth	10.7 cm
Width	4.1 cm
Torque limits	0.11 Nm (1 in-lb)
Mounting	Assigned slots of carrier
<b>Environmental specifications</b>	
Operating temperature	0 to 60 °C (32 to 140 °F)
Storage temperature	-40 to 85 °C (-40 to 185°F)
Relative humidity	5 to 95%, non-condensing
Airborne contaminants	ISA-S71.04-1985 Airborne Contaminants Class G3
Shock (normal operating conditions)	10 g ½-sine wave for 11 ms
Vibration (operative limit)	1 mm peak-to-peak from 5 Hz to 16 Hz, 0.5 g from 16 Hz to 150 Hz
Electromagnetic Compatibility	Per EN61326-1
<b>I/O Module LED Indicators</b>	
<b>I/O Module LED Indicators</b>	<b>ON Status Indicates</b>
Green – Power	DC power is applied.
Red – Error	An error condition.
Green – Active	I/O Driver is in active state.
Green – Standby	I/O Driver is in standby state.
Yellow – Pri. CIO	Communication status of Primary Control I/O bus
Yellow – Sec. CIO	Communication status of Secondary Control I/O bus
All except power flashing, alternating even and odd	Firmware upgrade in progress.



Specifications for the PROVOX I/O Carrier	
<b>Capacity</b>	Two system power supplies, two controllers, and two PROVOX I/O Interface cards (for redundant controller application)
<b>LocalBus Current (Maximum)</b>	
Input	10.8 A (includes maximum current for 8-wide I/O Interface if extended)
Output	8.0 A (only if extended)
<b>Dimensions</b>	
Height	22.15 cm (5 EIA rail units)
Depth	5.08 cm
Width	48.26 cm
Mounting	19 inch EIA rails
Mounting	Assigned slots of carrier
<b>Environmental specifications</b>	
Operating temperature	0 to 60 °C (32 to 140 °F)
Storage temperature	-40 to 85 ° C (-40 to 185°F)

To locate a sales office near you, visit our website at: [www.EasyDeltaV.com/reach](http://www.EasyDeltaV.com/reach)

...or call us at:                   Asia Pacific: 65.777.8211  
   Europe, Middle East: 41.41.768.6111  
   North America, Latin America: +1 800.833.8314 or  
   +1 512.832.3774

For large power, water, and wastewater applications contact Power and Water Solutions at:

[www.emersonprocess-powerwater.com](http://www.emersonprocess-powerwater.com)

...or call us at:                   Asia Pacific: 65.777.8211  
   Europe, Middle East, Africa: 48.22.630.2443  
   North America, Latin America: +1 412.963.4000

© Emerson Process Management 1996—2009. All rights reserved.  
 For Emerson Process Management trademarks and service marks, go to <http://www.emersonprocess.com/home/news/resources/marks.pdf>

The contents of this publication are presented for informational purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the design or specification of such products at any time without notice.

