

Model 1080F Configuration Data Sheet (CDS)

Page One

Copy this form, complete it as required, and fax it to the appropriate fax number listed on the next page

Customer Name: _____

Address: _____

Contact Person: _____

Phone: _____ Fax: _____

Date: _____ Number of Pages: _____

Rosemount order / Quote number: _____

Model Number _____

Enclosure Type:

- Selected as Standard Option in Model Structure
- Special Requirement: _____

Enclosure Entry:


- Selected as Standard Option in Model Structure
- Special Requirement: _____

Thermowell Material:

- Selected as Standard Option in Model Structure
- Special Requirement:
 - DIN 1.4401 [ANSI 316]
 - DIN 2.4816 [ASTM A494 (Inconel)]
 - Other: _____

Thermowell Diameter:

- Selected as Standard Option in Model Structure
 - Special Requirement:
 - Dimensions in millimeters
 - Dimensions in inches
- Outer Diameter: _____
Inner Diameter: _____



Mounting Style:

- Selected as Standard Option in Model Structure
- Special Requirement:
 - Flange Rating: _____
 - Flange Material:
 - DIN 1.4401 [ANSI 316]
 - DIN 2.4816 [ASTM A494 (Inconel)]
 - Other: _____

Product Data Sheet

00813-0100-4019, Rev BA
 Catalog 2006 - 2007

Rosemount 1080 and 1082

Page Two


Measurement Point Distribution:

- Selected as Standard Option in Model Structure
- Special Requirement (fill in table below)

Tagging:

- Default
- Special Requirement (fill in table below)– use with option code C1.

Point	Distance from Mounting Point	Point Tag	Transmitter Tag	Transmitter Range
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				

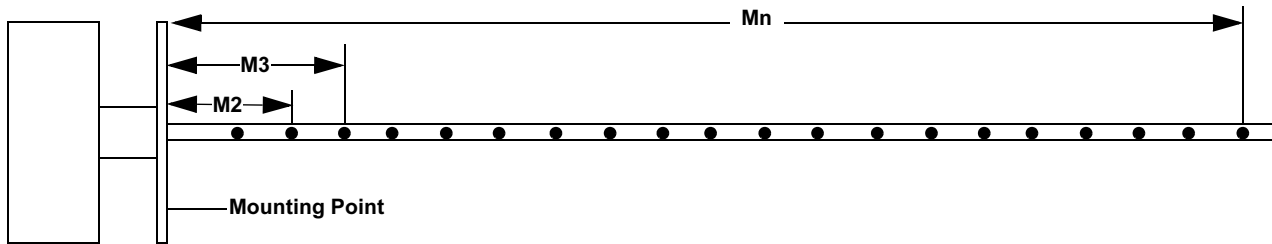

Rosemount Temperature GmbH
 Frankenstrasse 21
 63791 Karlstein
 Germany
 Fax: (49) 6188 992 286
 Phone: (49) 6188 992 0

Rosemount Inc.
 8200 Market Boulevard
 Chanhassen, MN 55317
 USA
 Fax: (1) 952 949 7001
 Phone: (1) 800 999 9307

Fisher-Rosemount
 Singapore Pte Ltd.
 1 Pandan Crescent
 Singapore
 Fax: (65) 777 0947
 Phone: (65) 777 8211