

# Vortex Technology Optimizes Alkylate Production at Refineries

## RESULTS

- Eliminated unscheduled shutdowns
- Increased measurement reliability
- Reduced number of potential leak points
- Reduced maintenance costs



## APPLICATION

Sulfuric acid to hydrocarbon feed ratio control to produce high-quality gasoline components (alkylates)

### Application Characteristic:

Fluid: Isobutane/Olefin feed, Flow: 1,000–14,000 BPD, Temperature: 40 °F (4.4 °C), Pressure: 90 psig (6.2 bar)

## CUSTOMER

A North American Refinery

## CHALLENGE


This refinery had been experiencing plugging/clogging of their DP orifice plates during the Alkylation process. They wanted to ensure safety by avoiding a potential explosion due to high temperatures in the alkylation process, and decrease downtime due to maintenance.

The alkylation process mixes an isobutane stream and olefin feed with a stream of sulfuric acid. Alkylation units in refineries produce alkylates, which are blended with straight-chain alkanos to adjust the octane rating of gasoline. The mixture is chilled to 40 °F (4.4 °C) and fed to two parallel reactors. The chemical reaction is highly exothermic, and runaway high temperatures may cause an explosion. To control temperature in the reactors, the system manipulates the flow rate ratio of the hydrocarbon and sulfuric acid feeds.

High reliability and low downtime are key equipment requirements in a refinery process like sulfuric acid alkylation. To optimize the process, measurements must be available at all times. Maintenance due to plugging/clogging of impulse lines or ports is unacceptable. In addition, minimizing the exposure of personnel to hazardous acids is critical to increasing safety.

Rangeability is especially pertinent to alkylation units because there is a significant seasonal change in flow rates to produce summer-grade and winter-grade gasoline.

*Eliminated plugged impulse lines, unscheduled shutdowns, and increased safety*

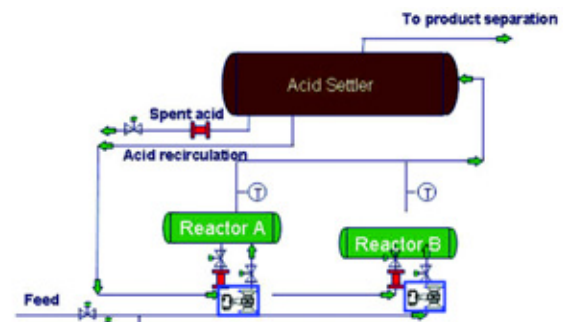

*Typical diagram of the alkylation process*

**ROSEMOUNT**

For more information:  
www.rosemount.com

  
**EMERSON**  
Process Management

Because of the physical nature of the feed, plugging of DP/orifice plate impulse lines by crystalline precipitates often occurs. The plugging caused loss of measurement, high maintenance costs, and was responsible for process downtime. Vibration and fluid pulsation also make the measurement difficult and often require expensive pipe braces.

### SOLUTION

The Rosemount 8800 Vortex Flowmeter crevice and port-free design make it immune to clogging from precipitates. The customer reported maintenance-free operation since installation in 1994 and made contingency plans to brace the pipes feeding the reactors. They had experienced problems with vibration and fluid pulsation on the sensor with previously installed meters.

The 8800 start-up went smoothly. The mass-balanced design and Adaptive Digital Signal Processing (ADSP) filtered out noise signals, and no braces were needed. The meters were installed with the factory-default configuration for filters, which resulted in trouble-free operation.

Due to the installation of the 8800 Vortex Flowmeter, the customer has eliminated downtime, increased measurement reliability, reduced the number of potential leak points, and reduced maintenance costs.

### RESOURCES

#### 8800 Vortex Meter Product Data Sheet

<http://www.emersonprocess.com/rosemount/document/pds>

*The non-clog design resulted in reduced maintenance costs and increased process uptime as the flow signal is now more reliable.*

The Emerson logo is a trademark and service mark of Emerson Electric Co. Rosemount and the Rosemount logotype are registered trademarks of Rosemount Inc. All other marks are the property of their respective owners.

#### Emerson Process Management

Rosemount Division  
8200 Market Boulevard  
Chanhausen, MN 55317 USA  
T (U.S.) 1-800-999-9307  
T (International) (952) 906-8888  
F (952) 949-7001  
[www.rosemount.com](http://www.rosemount.com)

#### Emerson Process Management Flow

Wiltonstraat 30  
3905KW Veenendaal  
The Netherlands  
Tel +31 (0) 318 495 555  
Fax +31(0) 318 495 556

#### Emerson Process Management

Emerson Process Management Asia Pacific  
Private Limited  
1 Pandan Crescent  
Singapore 128461  
T (65) 6777 8211  
F (65) 6777 0947  
Enquiries@AP.EmersonProcess.com

**ROSEMOUNT**

For more information:  
[www.rosemount.com](http://www.rosemount.com)

  
**EMERSON**  
Process Management