

Metals Manufacturer Increases Facility Availability with High Performance Guided Wave Radar

RESULTS

- Increased facility availability
- Reduced operations and maintenance costs
- Lowered safety risks and reduced cleanup costs

APPLICATION

Alumina Powder Storage Silo Level

Application Characteristic: Low dielectric, extreme dust conditions, 24 m (79-ft.) silo height

CUSTOMER

Aluminum manufacturer in China

CHALLENGE

This manufacturer of aluminum metal in China had trouble managing the alumina levels inside its silo storage units. Alumina is the feedstock of the facility and storage levels are important for the operation and efficiency of the facility.

The customer was previously using non-contacting radar for this application. Large silo height, alumina's low reflectivity, and extremely dusty conditions prevented the non-contacting radar from providing reliable level measurements.

Erroneous readings from the non-contacting radar device caused process interruptions from overfill, reducing availability of the facility. High operations and maintenance costs were also incurred because personnel had to make frequent visits to the silo units to ensure adequate levels of alumina. The unreliable level measurement also increased safety, health, and environment risks and led to cleanup caused from silo overfills.

SOLUTION

The Rosemount 5303 Guided Wave Radar with a single flexible probe was installed for this customer. Guided Wave Radar technology handled the high dust environment.

The patented Direct Switch Technology of the 5303 provides more signal over the long range to the surface than standard Guided Wave Radar units. In addition, the 5303 Probe End Projection is paired with Direct Switch Technology to ensure a reliable signal.



The high performance Rosemount 5303 decreased the number of process interruptions, and ultimately increased the availability of the facility.



This newly installed Rosemount 5300 eliminated future overfill

ROSEMOUNT

For more information:
www.rosemount.com


EMERSON
Process Management

Best core technology built in the high performance Rosemount 5300 provided this customer a reliable level measurement for their alumina silos. This solution decreased the number of process interruptions and ultimately increased the availability of the facility. Personnel no longer had to perform routine checks on the silo resulting in reduced operations and maintenance costs. Safety, health, and environmental risks were lowered, as well as cleanup costs associated with silo overflow.

RESOURCES

Rosemount 5300


<http://www.emersonprocess.com/rosemount/products/level/m5300.html>

Rosemount 5300 Product Data Sheet

<http://www.emersonprocess.com/rosemount/document/pds/00813-0100-4530.pdf>

Rosemount 5300 Technical Note

<http://www.emersonprocess.com/rosemount/document/notes/00840-2300-4811.pdf>

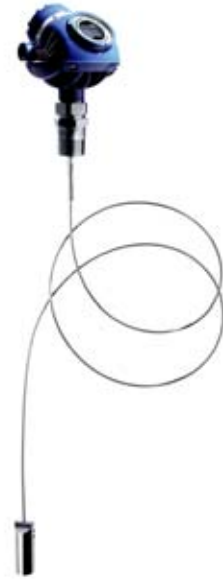

The Rosemount 5300 Guided Wave Radar with a Single Flexible Probe

The Emerson logo is a trade mark and service mark of Emerson Electric Co. Rosemount and the Rosemount logotype are registered trademarks of Rosemount Inc. All other marks are the property of their respective owners.

Standard Terms and Conditions of Sale can be found at www.rosemount.com/terms_of_sale

Emerson Process Management

Rosemount Division
8200 Market Boulevard
Chanhausen, MN 55317 USA
T (U.S.) 1-800-999-9307
T (International) (952) 906-8888
F (952) 949-7001

www.rosemount.com

Emerson Process Management

Blegistrasse 23
P.O. Box 1046
CH 6341 Baar
Switzerland
Tel +41 (0) 41 768 6111
Fax +41 (0) 41 768 6300

Emerson FZE

P.O. Box 17033
Jebel Ali Free Zone
Dubai UAE
Tel +971 4 811 8100
Fax +971 4 886 5465

Emerson Process Management

Emerson Process Management Asia Pacific
Private Limited
1 Pandan Crescent
Singapore 128461
T (65) 6777 8211
F (65) 6777 0947
Enquiries@AP.EmersonProcess.com

ROSEMOUNT[®]

For more information:
www.rosemount.com

EMERSON[™]
Process Management