


Data sheet

Sheet No.: A5.113 Rev. A
Date: November 2009

DIMENSIONS AND TECHNICAL DETAILS - ELECTRIC ACTUATOR

ELQ

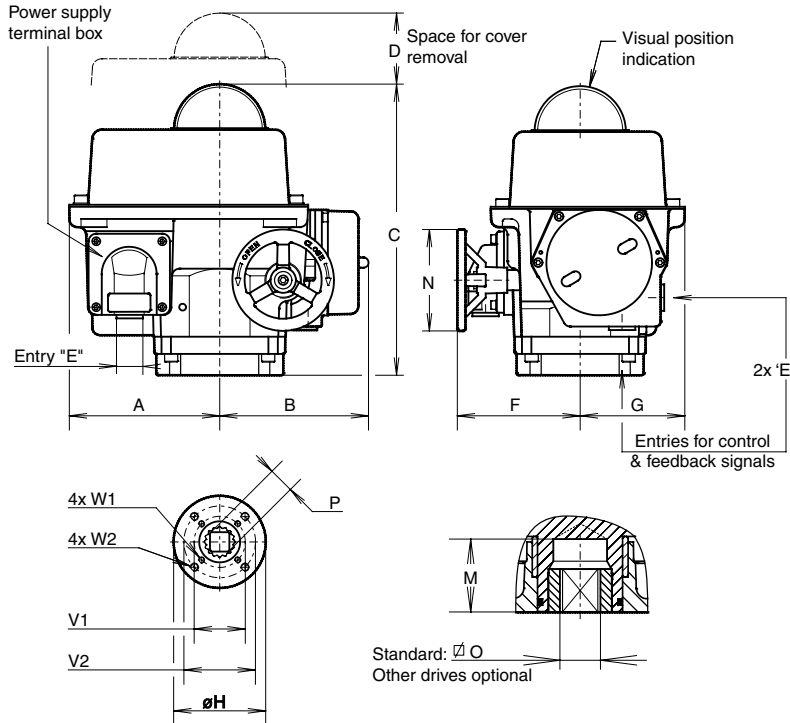

Dim. in inches	ELQ100	ELQ200	ELQ300	ELQ500	ELQ800
A	5.83	5.83	5.83	7.17	7.17
B	5.79	5.79	5.79	7.36	7.36
C	11.30	11.30	11.30	13.19	13.19
D	3.94	3.94	3.94	3.94	3.94
E	1/2" NPT	1/2" NPT	1/2" NPT	1/2" NPT	1/2" NPT
F	4.65	6.14	6.14	8.62	10.08
G	4.06	4.06	4.06	5.20	5.20
H	4.92	4.92	4.92	6.89	6.89
M	1.97	1.97	1.97	2.36	2.36
N	3.94	7.09	7.09	11.81	15.75
O max.	0.748	0.748	0.866	1.063	1.417
O min.	0.748	0.748	0.866	1.063	1.417
P	0.99	0.99	1.11	1.43	1.90
V1	2.756	2.756	2.756	4.016	4.016
V2	4.016	4.016	4.016	5.512	5.512
W1	5/16-18 x .53	5/16-18 x .53	5/16-18 x .53	3/8-16 x .63	3/8-16 x .63
W2	3/8-16 x .63	3/8-16 x .63	3/8-16 x .63	5/8-11 x .98	5/8-11 x .98

Description

Series ELQ electric actuators are powerful, 1/4 turn units with five sizes covering the torque range from 885 to 7081 In.lb. They incorporate High Ratio Drive (HRD) gearing which provides a compact backlash free reduction gear ideally suited for both tight positional control and long trouble free ON/OFF operation. Universal power control allows direct connection to all the usual voltages.

The aluminum alloy housing contains the motor, gear reduction and the Electronic Control Unit (ECU).

- Electronic control enables precise control of the actuators internal functions and a ready interface to a wide range of control options. Electronic torque control is included as a standard feature. Modular construction is used throughout and allows for a wide range of "kit" and "factory" options.

The manual override handwheel is constantly engaged, it is non-rotating and arranged so that at no time can be back driven by the motor. The handwheel is equipped with a spinner and so can be easily removed. The mounting/drive is to ISO 5211.

Specification

Nominal Rotation	: 90° - Analogue adjustable from 10° up to 100° of stroke
Enclosure	: IP65 / NEMA 4
Temperature	: -4°F to +158°F
Electrical Entry	: 3 x 1/2" NPT (Option M20 x 1.5)
Electrical Connection	: By internal terminal block
- Power supply	: AC - 115V, 230V, or 400V (+10% / -6%) 50/60 Hz : DC - 24V (±10%)
- Control signal	: 24VDC (±10%)
- Limit Switches	: 2 x SPDT, Micro switches (500mA at 30 VDC/VAC)
Torque Control	: Electronic
Duty cycle	: 100%
Mechanical Stops	: At 0° and 90°, adjustable +/- 10°
Heater	: Standard, 10 Watt
Visual Indication	: By raised dome on top cover
Finish	: Two component polyurethane coating
Materials	: Housing : Aluminum alloy : External Steel Parts : Stainless Steel

Kit options

- Position control
- Extra limit switches
- Position transmitter
- Local control station
- Speed control
- Status option

Factory options

- IP68
- Explosion proof ATEX or FM
- High temperature
- Low temperature
- Bus communication: Fieldbus Foundation

Performance		ELQ100	ELQ200	ELQ300	ELQ500	ELQ800
Torque (In.lb.)		885	1770	2655	4425	7081
Speed/90° (Sec.)	Max. load	10	14	18	22	36
	No load	6	8	13	17	28
Power Supply	115VAC	1	1	1	1.7	1.7
Max. Current (A)	230VAC	0.5	0.5	0.5	0.9	0.9
	400VAC	0.3	0.3	0.3	0.5	0.5
Max.	24V DC	4.1	4.3	4	5.3	5.1
	Power (W) Nominal	98	102	96	130	125
Weight (lb.)		29	31	32	62	66

EL-O-MATIC

www.El-O-matic.com

Copyright © Emerson Process Management. The information in this document is subject to change without notice.

Updated data sheets can be obtained from our website www.El-O-Matic.com or from your nearest Valve Automation Center **USA:** +1 813 319 0266 **Europe:** +31 74 256 10 10 **Asia-Pacific:** +65 6501 4600



EMERSON
Process Management