

BETTER INFORMATION FOR IMPROVED PERFORMANCE

The Smart Wireless THUM adapter can transmit up to four variables and additional HART status information at the user's configurable update rate. Access to this new information enables you to more fully optimize your operations for improved performance.

TECHNICAL REQUIREMENTS


Voltage drop across THUM: 2.25 Volts at 3.5 mA; 1 volt at 25 mA
 Loop resistance required: 250 Ohms
 Power requirements: 14.5 Volts
 THUM update rate: 16 seconds to 60 minutes

MODEL 54e FOUR-WIRE ANALYTICAL CONTROLLERS


- 54e pH / ORP
- 54e Conductivity / Resistivity
- 54e Amperometric: Dissolved Oxygen, Chlorine, Ozone

KEY FEATURES OF THE MODEL 54E ANALYZER

- Local access to user menus and diagnostics
- NEMA 4X (IP65) weatherproof corrosion-resistant enclosure
- Back-lit display with easy-to-use interface
- Three alarms with programmable logic, plus one dedicated fault alarm
- Optional TPC and PID control capacity
- HART® digital communication option required

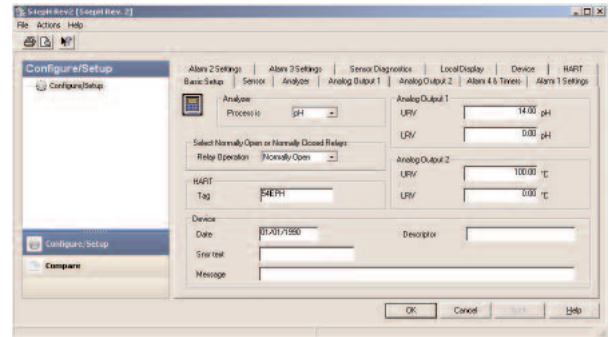

Configuration and set-up with AMS

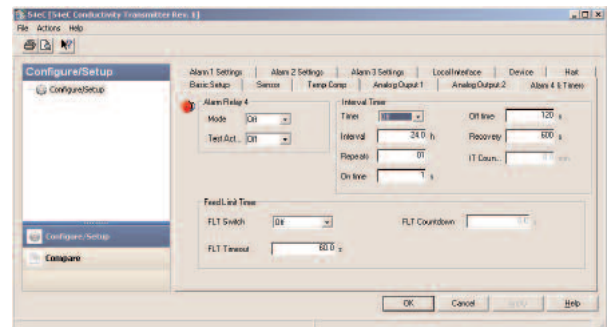

Advanced alarm diagnostics support live troubleshooting

Emerson Process Management
 Rosemount Analytical
 Liquid Division
 2400 Barranca Parkway
 Irvine, CA 92606
 T 949.757.8500
 T 800.854.8257
 F 949.474.7250
www.raihome.com

©2009 Emerson Process Management. All rights reserved.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Rosemount is a mark of one of the Emerson Process Management family of companies. All other marks are property of their respective owners.

The contents of this publication are presented for information purposes only, and while effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or service described wherein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.