


Integration Tools

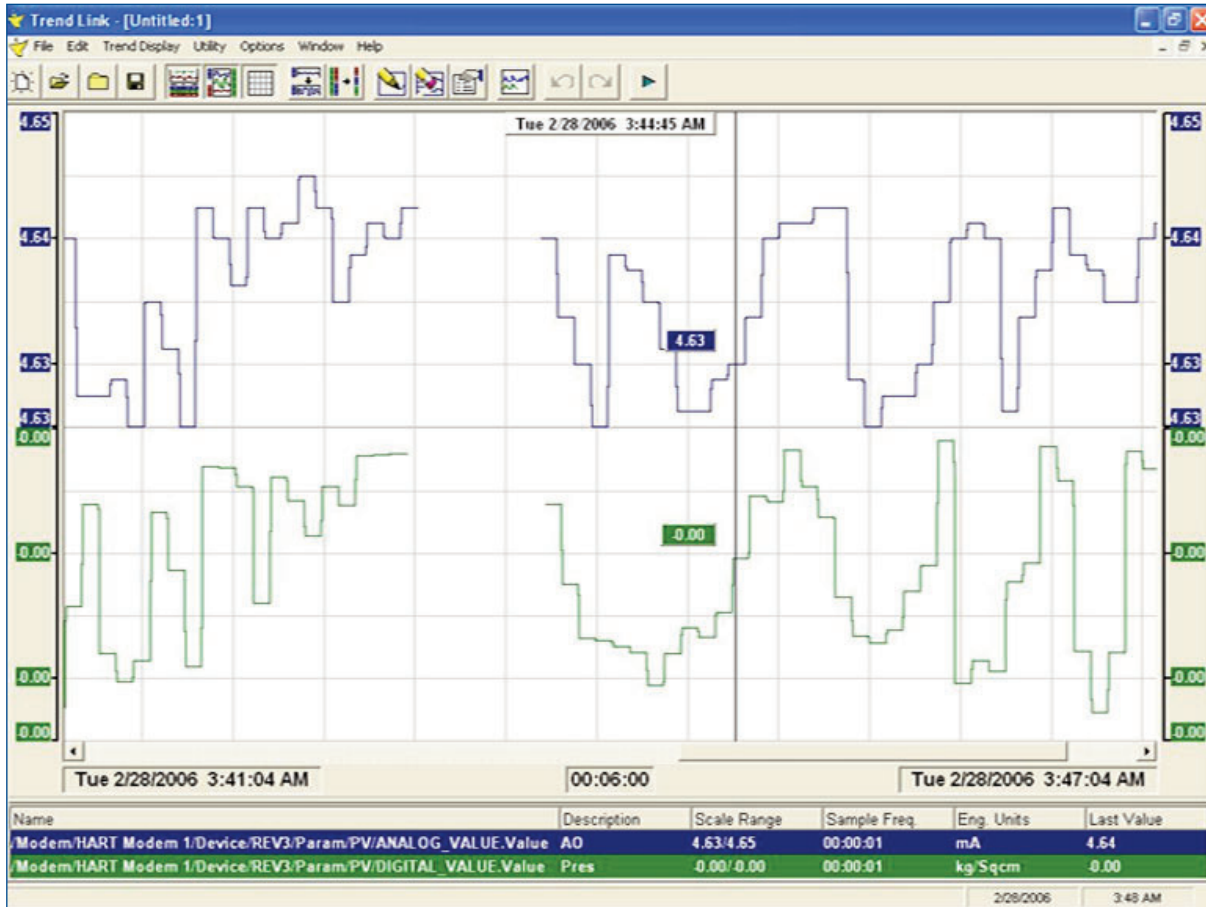

Leverage third-party trending applications through the OPC Server to view live instrument and valve data and access predictive diagnostics through AMS Device Manager.

- *Improve information flow between applications by easily sending online instrument and valve data to enterprise applications*
- *Reduce the potential for data entry errors and save time by automatically logging changes made through the OPC Server or Web Services to the Audit Trail*

The Integration Tools option for AMS Device Manager consists of two applications: an OPC Server and Web Services.

The OPC Server provides the ability to send live instrument and valve data values and Device Description (DD) parameters to OPC client applications. Access to AMS Device Manager field device data lets you act quickly and intelligently based on accurate field information.

	A	B	C	D	E	F	G
1	Device List via Web Service						
2	UserName:	admin		Get Device List			
3	Password:						
4	Tags:		leave this blank to get all devices.				
5							
6							
7							
8							
9		AMS Tag	AMS ID	Manufacturer	Device Type	Device Revision	Protocol
10		Pressure 1	550d5586-57e8-41c7-ab0b-97917e6578	Rosemount	1151 Conv	2	Conventio
11		Consistency Meter	4182f165-252f-4ebb-9e40-55ba402ca92	Thick	Consistency	4	Conventio
12		Test Eq	6d3c6d1e-f7b2-4b07-aa87-1325041f1ce	GE Calibrator	88	9	Conventio
13		05/24/2004 13:35:09.64	000003c00100050000012c	Arcom	HART Multiplexer	1	HART
14		05/24/2004 13:35:10.20	000003c00100050000012d	Arcom	HART Multiplexer	1	HART
15		05/24/2004 13:35:16.17	0000026000a000500000138	Rosemount	3044C	2	HART
16		xmitter 1	0000026000a000500000136	Rosemount	3044C	2	HART
17		05/25/2004 16:34:26.85	000001a000c000500001389	AEB Kent-Taylor	65x	1	HART
18		05/25/2004 16:34:27.42	000006600ef00050000138c	Manufacturer 102	Generic Device T	1	HART

Web Services allows you to access diagnostic data from AMS Device Manager and export a report to Excel for analysis.

Web Services provides you with the ability to collect and move data from AMS Device Manager and into other applications. Calibration data and Audit Trail entries are all easily accessed and transported via Web Services to other locations, giving you an easy way to fully utilize the data in AMS Device Manager for reporting or other uses.

OPC Server

The AMS Device Manager OPC Server is based on OPC Foundation guidelines. Interoperability between control applications, devices, and business applications is possible because of the OPC standard interface.

The OPC Server is best suited to periodically read or write a single data value to an instrument or valve connected to AMS Device Manager. The instrument or valve data value is sent over a HART connection communicating at 1200 baud, allowing an update to be witnessed on your OPC client application as quickly as every seven seconds.

OPC client applications may include:

- expert systems and historians for plant applications
- spreadsheets and intranet pages for desktop applications
- EAM/CMMS modules

The OPC Server can communicate with both HART® and FOUNDATION™ fieldbus protocols. FOUNDATION fieldbus parameters can be accessed through AMS Device Manager using the High-Speed Ethernet (HSE) Interface for systems where an Emerson host is not present.

Device parameters including process values from the OPC Server can be forwarded to a DCS or Historian that is also connected to the OPC Server. This allows you to forward a device parameter/status from AMS Device Manager to DeltaV™ through the OPC Server. The link between AMS Device Manager and the DCS connects the device parameter and alarm condition information.

Web Services

The Web Services provided by AMS Device Manager are used to interface HART, FOUNDATION fieldbus, or conventional device information in AMS Device Manager with third-party applications.

Web Services provides an interface that allows you to access data within AMS Device Manager. Web Services use XML to provide a platform and language independent implementation of distributed application services and information.

An updated Web Services application is available with each version of AMS Device Manager. Both of these options can be licensed via the Integration Tools license.

Benefits

- Improve information flow between applications by easily sending online instrument and valve data to enterprise applications or displaying it in other applications.

The possibilities are endless. Will you create a document that reports the current level and flow of your process? Will you create a spreadsheet that compares the process variables of multiple devices installed in similar application areas? Or will you monitor the ambient temperature of the instrument to alert you of potential freezing or overheating?

- Reduce the potential for data entry errors and save time by automatically logging changes made via the OPC Server to the Audit Trail.

Keeping accurate, on-going records is essential in regulated industries – but it can be costly both in time and money. The AMS Device Manager Audit Trail automatically generates a complete historical record for each device. Anytime a change is made to an instrument or valve through the OPC Server, an event is logged to the Audit Trail. Using Web Services, this data can then be used to help you analyze how your plant is running, allowing you to get the most from your system.

Requirements OPC Client

- OPC Data Access Custom Interfaces, Versions 1.0a, 2.05 or higher
- OPC Data Access Automation Interfaces, Version 2.0 or higher

Emerson Process Management

Asset Optimization

12001 Technology Drive
Eden Prairie, MN 55344 USA
T 1(952)828-3633
F 1(952)828-3006

©2011, Emerson Process Management.

The contents of this publication are presented for informational purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.

All rights reserved. AMS, DeltaV, and PlantWeb are marks of one of the Emerson Process Management group of companies. The Emerson logo is a trademark and service mark of Emerson Electric Co. All other marks are the property of their respective owners.



AMS Suite: Intelligent Device Manager powers PlantWeb through predictive and proactive maintenance of intelligent field devices to improve availability and performance.