

# Paper Mill Reduces Material Costs and Improves Paper Quality with High Signal Magmeter Technology

## RESULTS

- Reduced raw material costs
- Improved paper quality
- Reduced process variability by 5%



## APPLICATION

Basis weight control measurement

**Application Characteristics:** 4.5% Pulp Stock, 16 inch line size

## CUSTOMER

Paper mill in North America

## CHALLENGE

This paper mill was looking to reduce process variability caused by excessive damping and unstable readings in their application of basis weight control measurement. This measurement determines the amount of stock flow to the head box of a feedback loop from the basis weight measurement of the final paper product. This mill recognized an opportunity to reduce material costs by improving the control of the head box measurement. The high level of damping in the existing magnetic flowmeter caused the mill to use an excessive amount of stock to meet the paper weight goals. When the mill reduced the amount of damping, the flow signal became erratic, leading to poor process control and varying paper quality. This mill needed a flowmeter that would provide a stable measurement and a fast response time to improve quality and profitability.

## SOLUTION

Through a selection process, the mill decided to test two meters' stability and response time performance - a Dual-Frequency Magmeter from one manufacturer and the Rosemount 8712 High Signal Magmeter. These tests showed the 8712 High Signal to be four times more stable in the application as shown in figure 1. In the response time test, as shown in figure 2, the 8712 High Signal responded three times faster to a step change in the process.

Based on the results of this testing, the user installed the Rosemount 8712 High Signal Magmeter, and was able to achieve their goal of improving process control, adjusting their set point lower, and ultimately reducing their material costs while improving paper quality, as shown in figure 3.

*The 8712 High Signal Magmeter improved stability and response time.*



*Rosemount 8712 High Signal™ with easy-to-use Local Operator Interface (LOI).*

**ROSEMOUNT**®

For more information:  
www.rosemount.com

  
**EMERSON**™  
Process Management

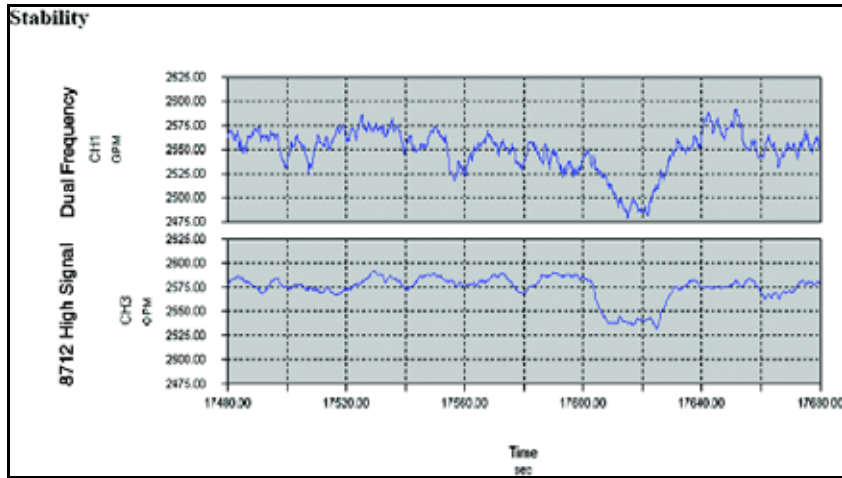


Figure 1

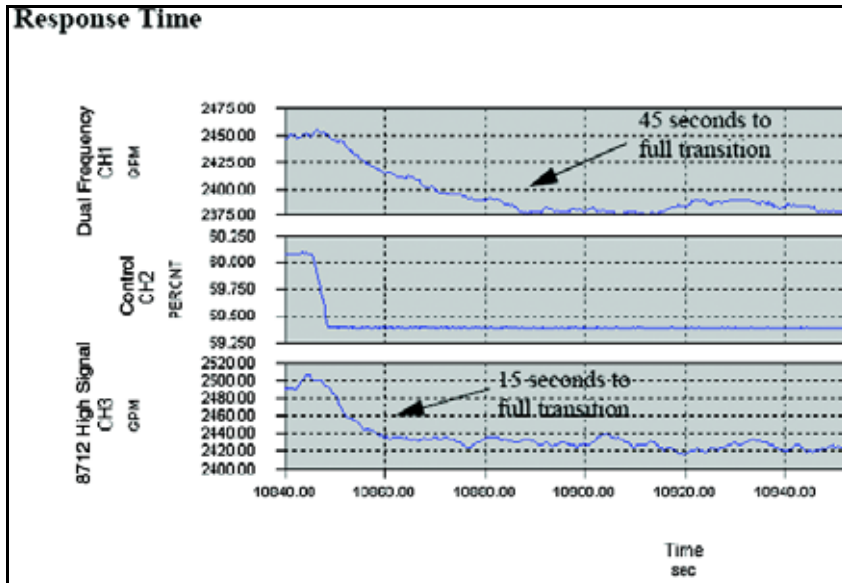


Figure 2

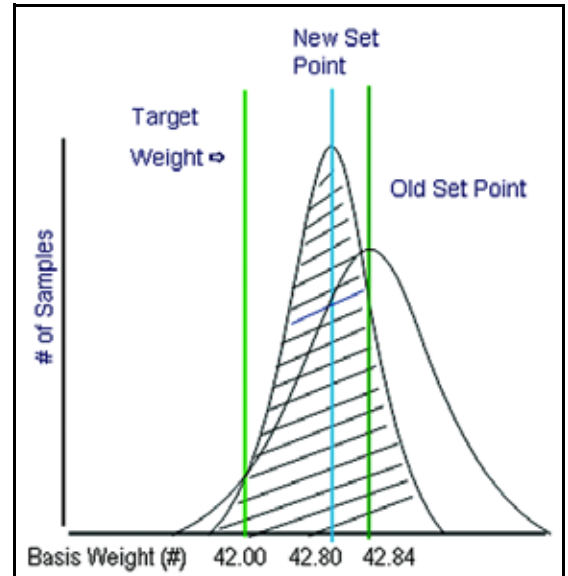


Figure 3

The Emerson logo is a trade mark and service mark of Emerson Electric Co. Rosemount and the Rosemount logotype are registered trademarks of Rosemount Inc. All other marks are the property of their respective owners.

**Emerson Process Management**  
 Rosemount Division  
 8200 Market Boulevard  
 Chanhassen, MN 55317 USA  
 T (U.S.) 1-800-999-9307  
 T (International) (952) 906-8888  
 F (952) 949-7001  
[www.rosemount.com](http://www.rosemount.com)

**Emerson Process Management**  
 Wiltonstraat 30  
 3905 KW Veenendaal  
 The Netherlands  
 T 31 (0) 318 495 555  
 F 31 (0) 318 495 556

**Emerson Process Management**  
 Emerson Process Management Asia Pacific  
 Private Limited  
 1 Pandan Crescent  
 Singapore 128461  
 T (65) 6777 8211  
 F (65) 6777 0947  
[Enquiries@AP.EmersonProcess.com](mailto:Enquiries@AP.EmersonProcess.com)