
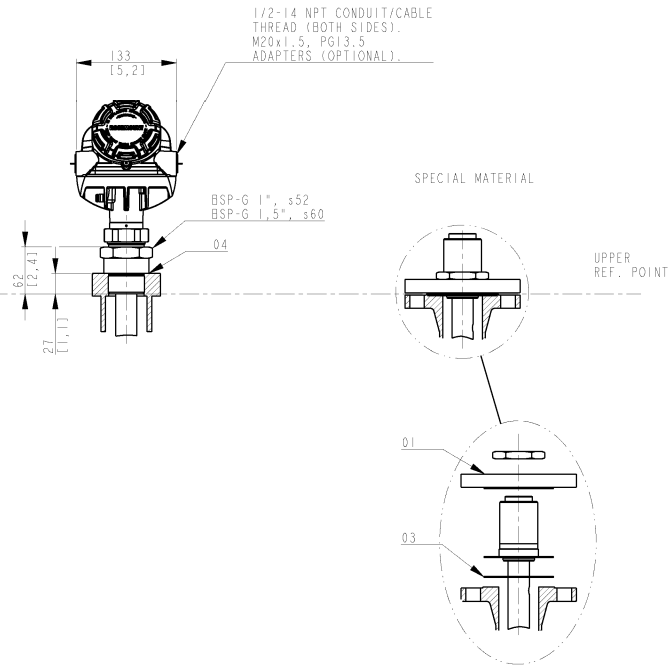


DEPENDIG ON TURBULENCE IN TANK AND MOUNTING ANGEL THE PROBE MAY NEED TO BE ANCHORED OR SUPPORTED.

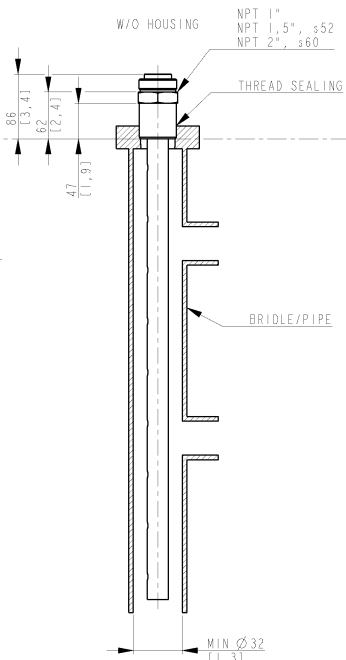

1. P/T-RATING FOR FLANGE: SEE REF. MANUAL.

POS	ITEM	DESCRIPTION	QTY	REMARK	SUPPLIER
04	GASKET	I	ACC. TO BSP-G THREAD STD.		CUSTOMER
03	GASKET	I	SOFT GASKET T=MIN 1.6 (ANSI B16.5/1c, EN1514-1/1BC). SEE NOTE 1.		CUSTOMER
02	SCREW/NUT/WASHER	-	ACC. TO FLANGE STD, SEE NOTE 1.		CUSTOMER
01	FLANGE	I	DIM. ACC. TO ANSI B 16.5/EN 1092-1, OTHER ON REQUEST. P/T RATING, SEE NOTE 1.		RMT

ISSUED BY	REV	PRODUCT CODE	FILE	INSTALLATION DRAWING TITLE		
EMe-HW-C	0909	5300	PRO/E	MECHANICAL INSTALLATION DWG		
APPROVED BY	REV	ORIGINAL DWS. NO.	SCALE			
EMe-HF	0909	9240030-996	-	COAXIAL LEAD		
ROSEMOUNT®		T ST ANGLE	DOC TYPE	DWG NO	ISSUE	SHEET
		2	2	9240030-996	02	1/1

THE COPYRIGHT/OWNERSHIP OF THIS DOCUMENT IS AND WILL REMAIN OURS. THE DOCUMENT MUST NOT BE USED WITHOUT OUR AUTHORIZATION OR BROUGHT TO THE KNOWLEDGE OF A THIRD PARTY. CONTRAVENTION WILL BE PROSECUTED. ROSEMOUNT TANK RADAR AB, SWEDEN

FOR MORE INFO, SEE REFERENCE MANUAL.